

## MLT THREE 2M B-Stock


Pre rig truss

No closed head frame

Open at the bottom making it easier to mount moving lights or video modules

Dolly has extended telescopic legs that allow you to mount complete video modules including the hanging frame in the truss and leave them in the truss during transportation

Optional double rail system is available - units can be hung on 2 different levels with no lowering device required. The rail system also allows you to mount lighting equipment at the transitions between two trusses to create seamless transitions between the video modules in the trusses

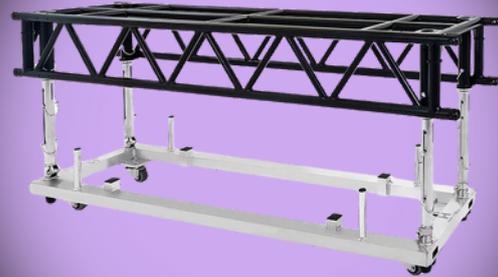

When loaded vertically, the load capacity of the MLT THREE is the same as that of the MLT TWO  
When using both systems in a track, the static calculation of the MLT THREE must be applied

MLT THREE has telescopic legs, folding legs and rotating fork connectors, just like the MLT TWO

Tube: 48,3 x 4,5 mm, Bracing: 30 x 3 mm

Material: Aluminium EN AW 6082 T6, Color: RAL 9005

